


"User Friendly" Optional Device

UTL Device: Automatic Under Thread Trimmer with anti-unravelling function

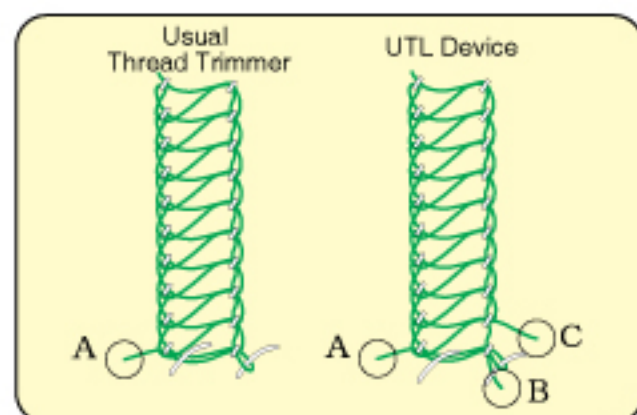


* The anti-unravelling function has been proved as effective by Washing Test implemented by an accredited Japan National Laboratory.

UTL device cuts the under thread at two points of "A" and "B" as the above picture. As "C" becomes the thread end, it prevents the seam from unraveling, unlike the case only "A" is cut at the end of the seam.

- ◆ The new function automatically works as your operator activates thread trimmer even without noticing it, and brings quality level of your work to the higher level.
- ◆ The tiny device can be installed on the right side of needle drop so that you can make the best use of the "Streamline Cylinder" of VC2790G. Also the device can be added on your existing Yamato VC and VG machines for you to enhance your quality while making the best use of your existing resources.

WF Device

Walking Presserfoot Device

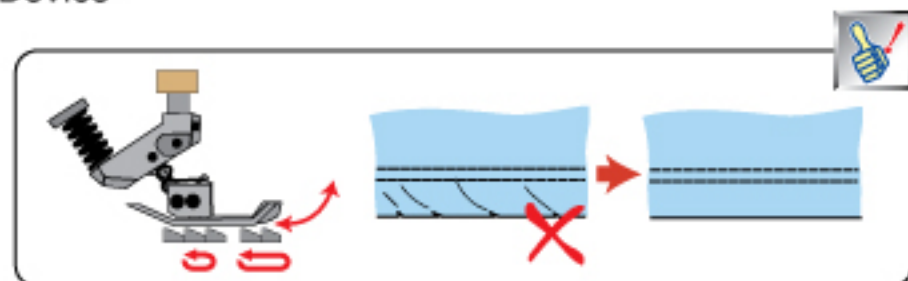

Walking Presserfoot releases unnecessary pressure on the fabric sewn and helps your work finished without waves and twists. Also, it is effective in lightening tracks of presser foot on dark-colored fabric.

Yamato
Made in Japan

VC2790G-8F

2,3 Needle Streamline Cylinder Bed Interlock Stitch Machine



Yamato
Made in Japan

VC2790G-8F CLASS

2,3 Needle Streamline Cylinder Bed Interlock
Stitch Machine

Numbering of Models

VC2790G-156M-T1N-8F/UT-A34F/ST2-A

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Symbol of Series
- ② Class No
- ③ Number of Needle: 7=2,3 needles
- ④ Submodel
- ⑤ Top Cover Thread Mechanism: 1=With Top Cover Thread
- ⑥ Needle Distance:
2 needles: 32=3.2mm 40=4.0mm
3 needles: 48=4.8mm 56=5.6mm 64=6.4mm
- ⑦ Shape of Stitch Tongue on Stitch Plate
- ⑧ Covering Style



⑨ -8F=With Active Thread Control

⑩ Device



Specifications

| Model | Seam Style | ! | ! | ! | ! | ! | ! | ! | ! | ! | ! |
|---------------|-------------------------------------------------|----------------------|----------|-------------------|---------|---|----------------|--------------|------------|------------------|---|
| VC2790G-8F | Covering K Type Hem Covering T Type | UY129GAS 3 (2) | 5 (4) | 4.8 5.6 6.4 | 1.4~3.6 | ! | 10.3~12.9 ! | 7.5 (MAX) | 31 (33) | 6,000 sti/min | ! |
| VC2790G-8F-SM | ! | UY129GAS 3 (2) | 5 (4) | 3.2 4.0 4.8 | 1.4~3.6 | ! | 10.3~12.9 ! | 7.5 (MAX) | 31 (33) | 6,000 sti/min | ! |

Device

UT-A34F:
Automatic Under Thread Trimmer

ST2-A:
Automatic Top Cover Thread Trimmer




YAMATO SEWING MACHINE MFG. CO., LTD.
4-12, 4-CHOME, NISHI-TENMA, KITA-KU, OSAKA, 530-0047, JAPAN
http://www.yamato-sewing.com

YAMATO U.S.A. INC. TEL: +1-803-548-0334/FAX: +1-803-548-0405
YAMATO EUROPE GmbH. TEL: +49-40-355347-0/FAX: +49-40-354371/E-mail: sales@yamato.de
YAMATO (HONG KONG) CO., LTD. TEL: +852-2721-0251/FAX: +852-2723-0444/E-mail: yamato@yamato-sewing.com.hk
香港 (香港) 有限公司 東莞代表處 TEL: +86-769-86231363/FAX: +86-769-86231362
大和縫紉機 (寧波) 有限公司 TEL: +86-574-86800518, 86800558/FAX: +86-574-86800555/E-mail: marketing@yamato-china.com
大和縫紉機製造株式會社 青島事務所 TEL: +86-532-85783175/FAX: +86-532-85783172
大和縫紉機製造株式會社 上海事務所 TEL: +86-21-84400017, 84400019/FAX: +86-21-84400021
YAMATO SINGAPORE PTE LTD. TEL: +65-6287-1955/FAX: +65-6287-1028/E-mail: sales@yamato-sewing.com.sg
YAMATO SINGAPORE PTE LTD., INDIA LIAISON OFFICE, TRIPUR MAIN BRANCH TEL: +91-421-4333701/FAX: +91-421-4333702/E-mail: yamato-sewing@airtelbroadband.in
YAMATO SINGAPORE PTE LTD., INDIA LIAISON OFFICE, DELHI BRANCH TEL: +91-11-41603280/FAX: +91-11-41603281
YAMATO SINGAPORE PTE LTD., CUSTOMER SERVICE CORRESPONDENT IN JAKARTA, INDONESIA FAX: +62-21-781-8727
YAMATO SINGAPORE PTE LTD., BANGLADESH LIAISON OFFICE TEL: +88-02-899-1884/FAX: +88-02-899-1885
YAMATO MEXICO OFFICE TEL: +52-55-5764-9080/FAX: +52-55-5578-1470
THE RESIDENT REPRESENTATIVE OFFICE OF YAMATO SEWING MACHINE MFG. CO., LTD IN HO CHI MINH CITY TEL: +84-8-6296057/FAX: +84-8-38113384
www.yamato-sewing.co.jp (日本語) www.yamato-sewing.com (English) www.yamato-sewing.com.cn (中文)
Catalogue No.2034E Edition No.3 03/2012



Easy Operation

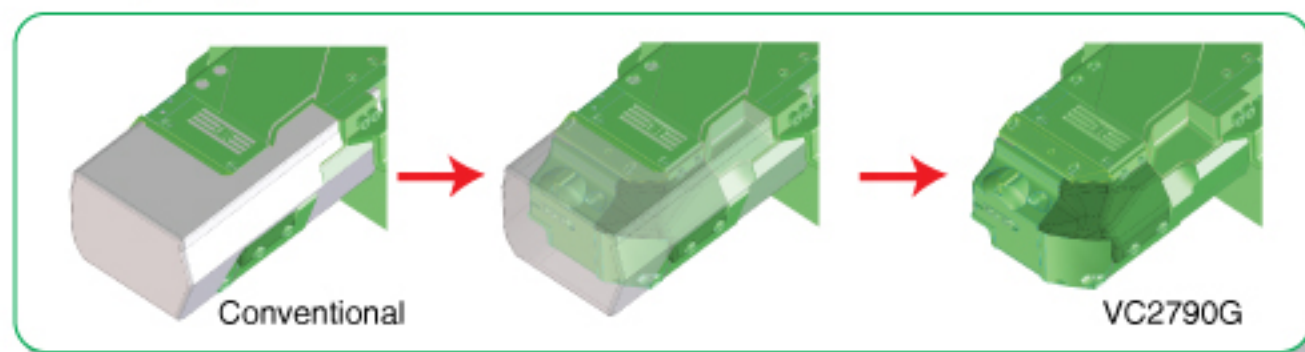

Streamline cylinder bed makes operator's handling easier!
With conventional cylinder bed interlock machine, more manual work for setting, feeding and removing is required due to its cylinder shape.




Averagely, efficiency of covering on T-Shirt was enhanced over 20% by using VC2790G!

Moreover, streamline cylinder bed helps you reducing defects and enhancing productivity by reducing operator's tiredness.

Easy Maintenance

Looper Thread Take-Up System

The cam is located outside of the frame for easy adjustment and removal. Downtime to unwind looper thread in case it winds itself around the cam is dramatically shortened. (Average only 1/8 of time required for recovery from the same on machine with cam inside of the frame.) Also, the cam can be exchanged easily according to different sewing conditions.

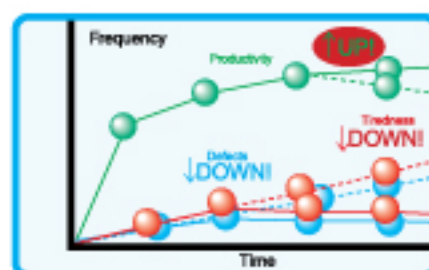

Side Cover (Open/Close Type)


It is unnecessary to open all the way on cleaning.




Easy Maintenance!

No Stain, No Worry! And...

- A very little amount of oil has been forcibly and consistently supplied to exactly necessary part of needle bar crank area for smooth machine run and long life.
- Special sealing technology is introduced to make surface of needle bar, looper bar and other moving parts clear of oil whenever they are outside of internal mechanical compartment. And it prevents the work from stain.
- Oil excess has been forcibly circulated, cooled down and filtered for next cycle of lubrication.



Prevent oil leakage from cylinder!

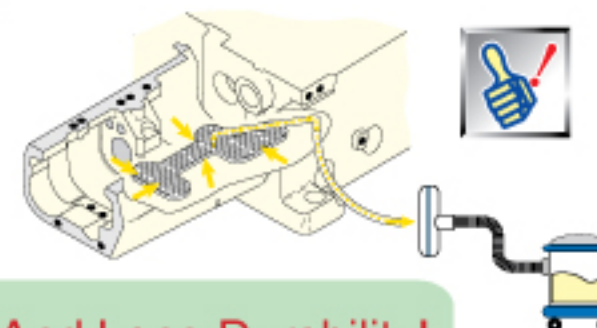

Reducing Risk Of Oil Leakage And Long Durability!

Versatility


Tip Over Covering



for Hemming



for Covering

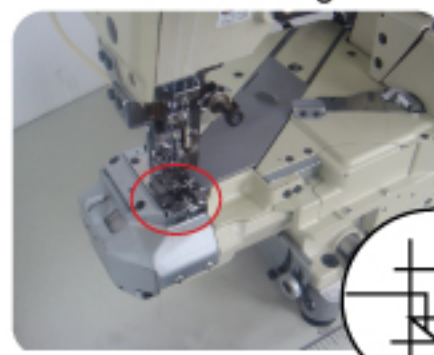


for Binding




High Flexibility

VC2790G introduces "Active Thread Control" which takes in and draws back thread when it is required, and well-balanced seams with minimum necessary tension (resistance) for thread regulation. Besides, wide variety of seams, from soft and elastic seams to standard seams, can be performed by the simple and "visible" adjustment, not by the "fuzzy" adjustment using thread tension devices.


- from Fleece to Microfiber

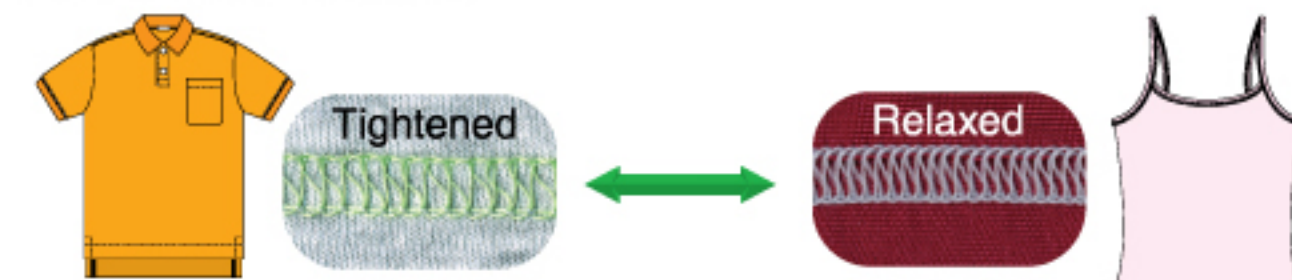

- Tunnel Free Finish

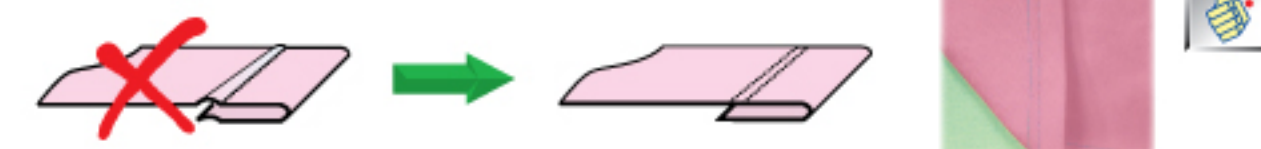

- Soft Seam Suitable for Microfiber

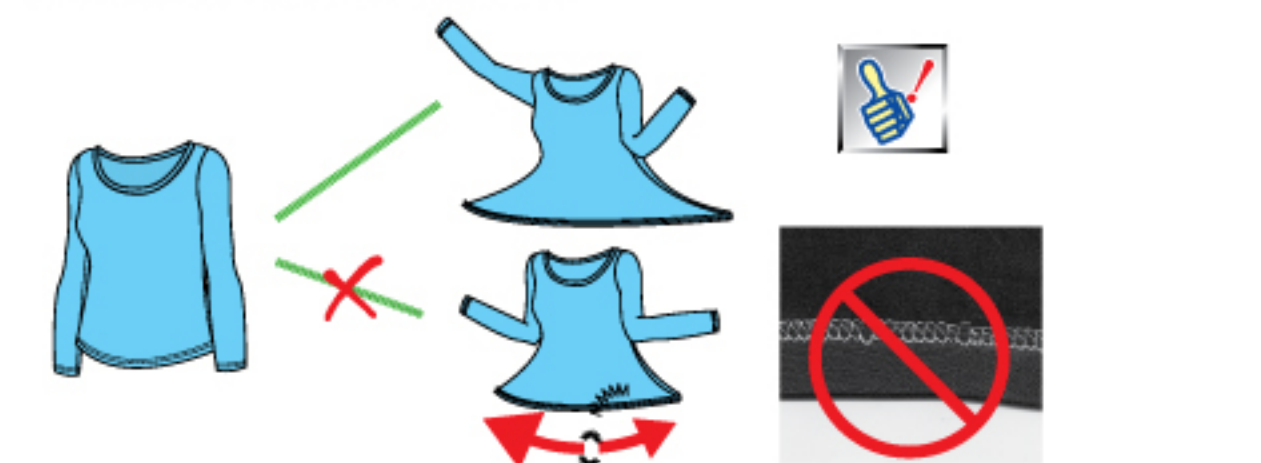

200%+ Stretch!

