


**Yamato** *Made in Japan*

# ACCU-10

[ækju-tén]

Computerized Accurate Tape Tension Controller

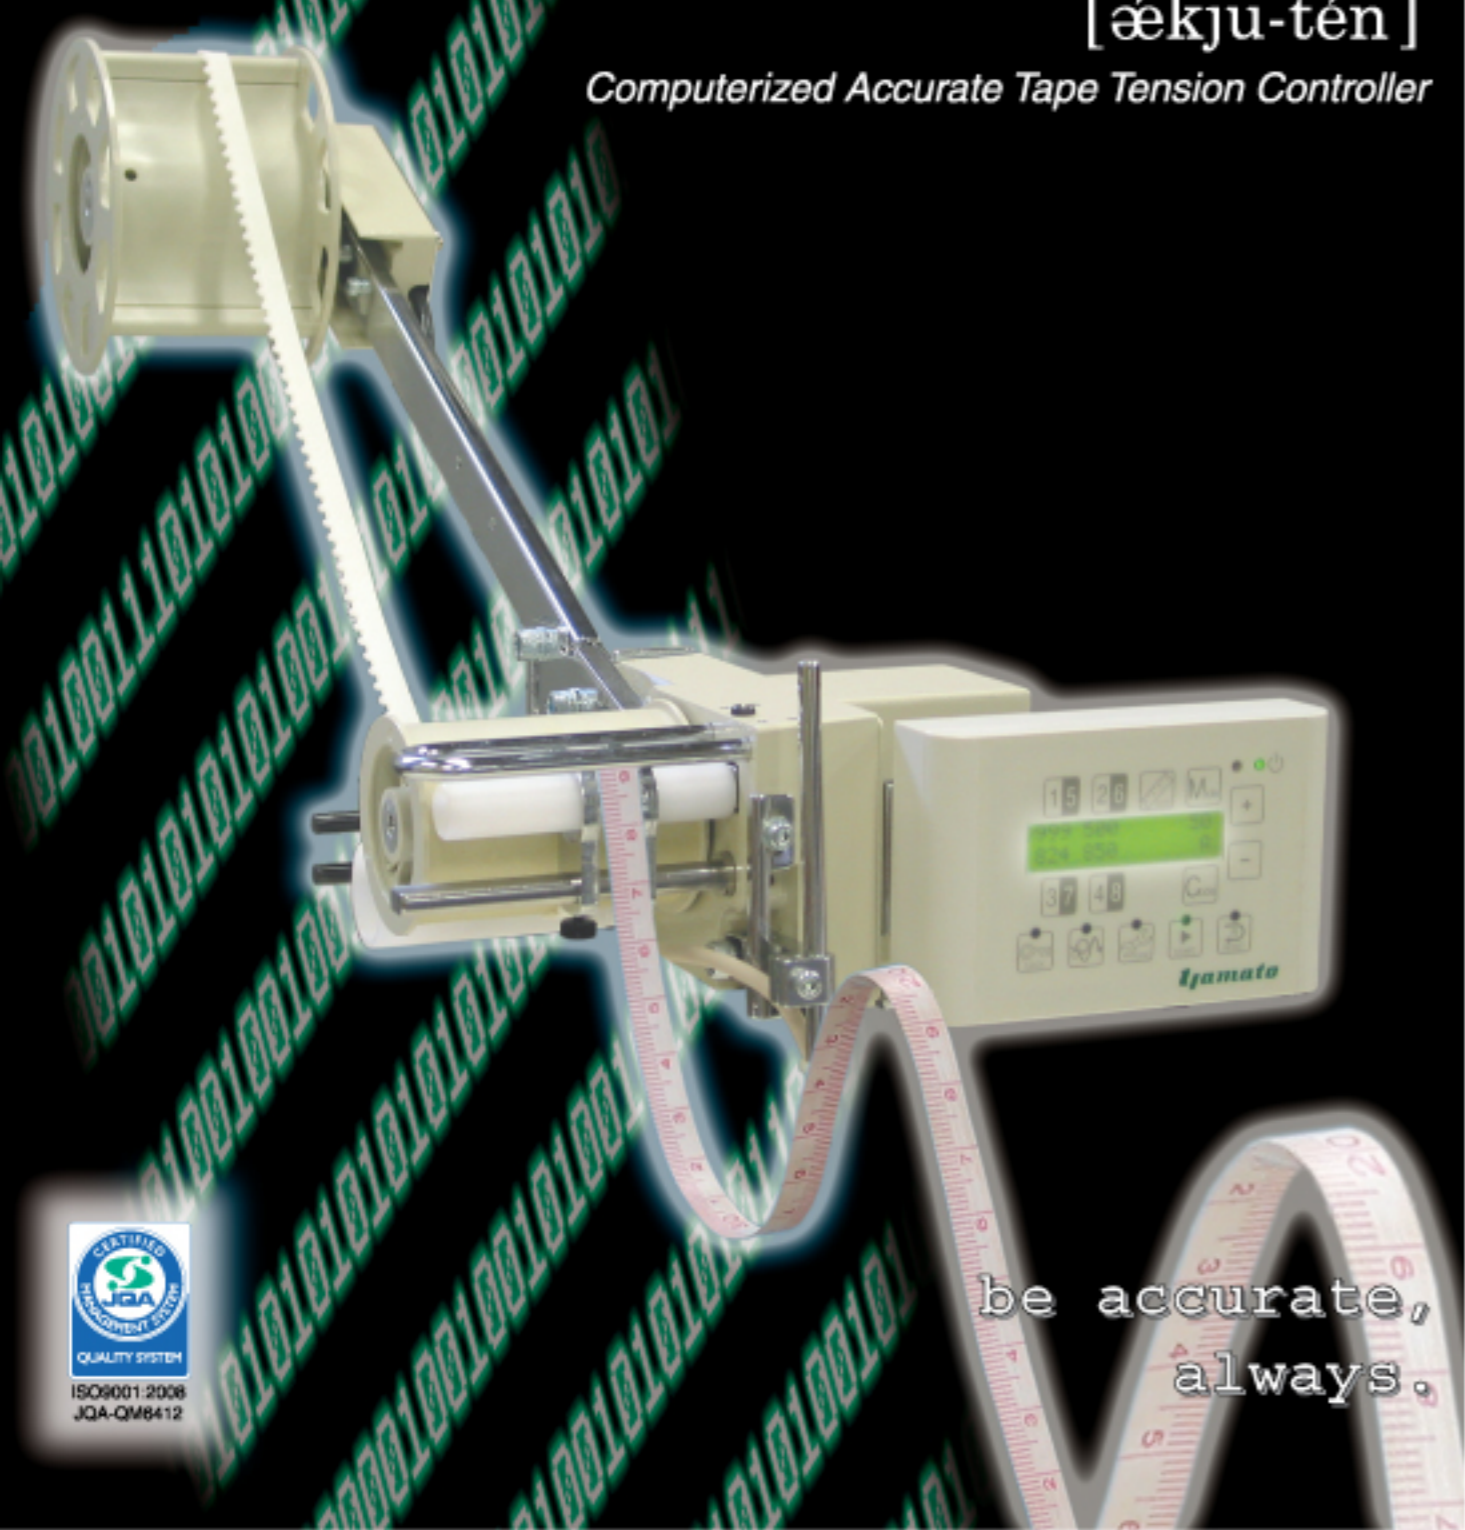

**Yamato**  
*Made in Japan*



ISO9001:2008  
JQA-QM8412

be accurate,  
always.



**YAMATO SEWING MACHINE MFG. CO., LTD.**  
<http://www.yamato-sewing.com>


**HEAD OFFICE**

4-12, 4-CHOME, NISHI-TENMA, KITA-KU, OSAKA, 530-0047, JAPAN  
TEL:+81-6-6384-5621 / FAX:+81-6-6384-7185 / E-mail: [export-dept@yamato-sewing.com](mailto:export-dept@yamato-sewing.com)

YAMATO U.S.A. INC.	TEL:+1-803-548-0334/FAX:+1-803-548-0405
YAMATO EUROPE GmbH	TEL:+49-40-355347-0/FAX:+49-40-354371/E-mail: <a href="mailto:sales@yamato.de">sales@yamato.de</a>
YAMATO (HONG KONG) CO., LTD.	TEL:+852-2721-0251/FAX:+852-2723-0444/E-mail: <a href="mailto:yamato@yamato-sewing.com.hk">yamato@yamato-sewing.com.hk</a>
雅清 (香港) 有限公司 东莞代表处	TEL:+86-769-86231363/FAX:+86-769-86231362
大和缝纫机 (宁波) 有限公司	TEL:+86-574-86800518, 86800558/FAX:+86-574-86800555/E-mail: <a href="mailto:marketing@yamato-china.com">marketing@yamato-china.com</a>
大和缝纫机制造株式会社 青岛事务所	TEL:+86-532-85783175/FAX:+86-532-85783172
大和缝纫机制造株式会社 上海事务所	TEL:+86-21-64400017, 64400019/FAX:+86-21-64400021
YAMATO SINGAPORE PTE LTD.	TEL:+65-6287-1855/FAX:+65-6287-1028/E-mail: <a href="mailto:sales@yamato-sewing.com.sg">sales@yamato-sewing.com.sg</a>
YAMATO SINGAPORE PTE LTD, INDIA LIAISON OFFICE, TIRUPUR MAIN BRANCH	TEL:+91-421-4333701/FAX:+91-421-4333702/E-mail: <a href="mailto:yamato-sewing@airtelbroadband.in">yamato-sewing@airtelbroadband.in</a>
YAMATO SINGAPORE PTE LTD, INDIA LIAISON OFFICE, DELHI BRANCH	TEL:+91-11-41803280/FAX:+91-11-40574881
YAMATO SINGAPORE PTE LTD, CUSTOMER SERVICE CORRESPONDENT IN JAKARTA, INDONESIA	Fax: +62-21-781-8727
YAMATO MEXICO OFFICE	TEL:+52-55-5764-9090/FAX:+52-55-5578-1470
THE RESIDENT REPRESENTATIVE OFFICE OF YAMATO SEWING MACHINE MFG. CO., LTD IN HO CHI MINH CITY	TEL:+84-8-62969057/FAX:+84-8-38113384

### Accurate!

As the device always adjust tape feeding amount to be right tension on tape while measuring actual tension, accurate finish can be obtained.\*1)

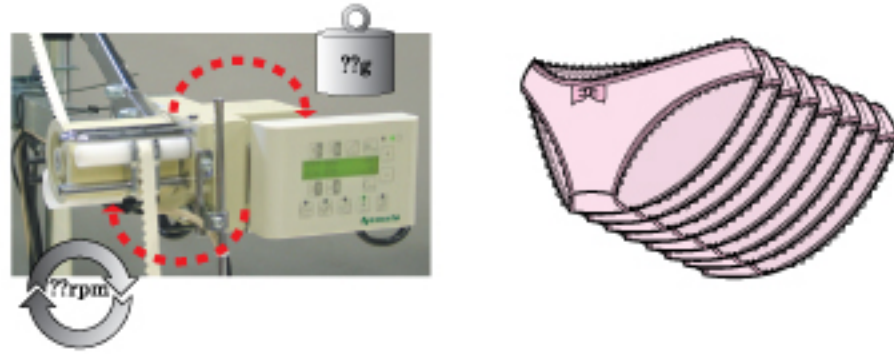

### User-friendly! -1

Voltage free! - automatically applicable from 100V-240V. Just plug in. It's ready to use!

AC100V  
~ AC240V



### User-friendly! - 2

Intuitively operatable control panel for various settings.


- Simple operation to set tensions, modes, etc.
- 8 different tensions can be set in one style, and 50 different styles can be stored and easily paged.
- Marriage of different styles is possible in case more different tensions needed for 1 style - Maximum 400 tensions can be set!
- Copy-Paste of style is available for quicker setting of similar styles.
- "Teaching mode" is available (in case of automatic process change) for practical setting of tension and process changing points.

### User-friendly! - 3

\*Seamless setting from highest to lowest tension - No need for additional "fine adjustment" even for extremely low tension.

### User-friendly! - 4

7-segment process display and "count-down indicator (in case of automatic process change)" informs current process and approach of process changing point without forcing operators to turn their head.

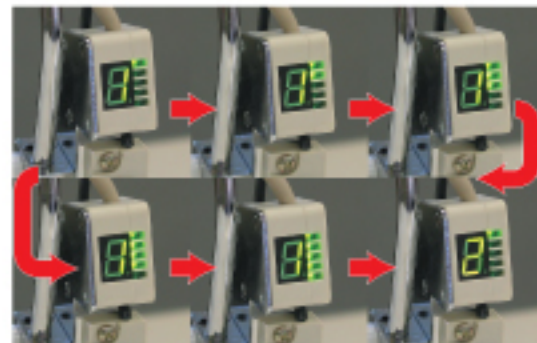

### Versatile! -1

Can be set on table in many ways to feed tape from top, bottom and side of machine. Besides, for convenience at each setting position, rotating direction of untangling wheel can be switched.

### Versatile!-2

Can also be used as "tension free tape dispenser" in case the work does not require tension tape feeding.



### Versatile!-3

Can be used along with any kinds of sewing machine used for tape attaching operation to upgrade your product quality by the efficient use of your existing resources.\*2)



### Expandable!

The device has capability to control various additional devices like tape cutter.



**ACCU-10**  
[あくじゅ-てん]  
Computerized Accurate Tape Tension Controller

\*1) Finishing size may vary in case fabric size is not stable piece by piece and/or operators give unnecessary tension on fabric.

\*2) ...but still combination with Yamato machines is highly recommended!